



1-800 Water Damage of Newtown

Insured: Central Bucks South (CLN)
Property: 1100 Folly Rd
Warrington, PA 18976

Claim Rep.: Sid Sarin

Business: 1801 Second Street Pike
Richboro, PA 18954

Business: (215) 586-7800

E-mail: newtown.info@1800waterdamage.com

Estimator: Sid Sarin
Business: 1801 Second Street Pike
Richboro, PA 18954

Business: (215) 586-7800
E-mail: newtown.info@1800waterdamage.com

Claim Number: 20067019

Policy Number: 0

Type of Loss: Fire

Date Contacted: 5/18/2026 10:07 PM

Date of Loss: 5/18/2026 10:00 PM

Date Inspected: 5/18/2026 10:27 PM

Date Received: 5/18/2026 10:07 PM

Date Entered: 5/21/2026 2:32 PM

Price List: PAPH8X_02MAY26
Restoration/Service/Remodel

Estimate: 5116-26-0264-CLN2



1-800 Water Damage of Newtown

Enclosed is the estimate for emergency services provided at the above noted address.

Please review this information and feel free to contact me at 215-631-7000 or email - Ashley.Perrone@1800waterdamage.com with any questions or concerns. Our Office can be reached at **215-586-7800 or newtown.info@1800waterdamage.com**

Agreed services are performed based on the assigned work authorization from the policy holder which authorizes the insurance carrier to issue direct payment to 1-800-WATER-DAMAGE for any and all services provided. A copy of this authorization is included along with this estimate/invoice.

Any separate areas added to the scope shall be viewed as a change order and costs shall be added when the final invoice is submitted

Please be advised that the insured has specifically requested for 1-800-WATER-DAMAGE's invoices to be addressed separately from the rest of the claim, and for an agreed settlement amount to be reached prior to payment being issued. All settlement agreements should be discussed directly with 1-800-WATER-DAMAGE's staff as no one else has the authority to do so. To ensure that all the insured's interests are protected, please take the time to review this invoice and contact 1-800-WATER-DAMAGE with any revision or additional documentation requests. Once an agreement is reached, 1-800-WATER-DAMAGE will accept the agreed settlement amount as full and final payment.

Checks can be made payable to 1-800-WATER DAMAGE of Newtown.

Payment for 1-800-WATER-DAMAGES's services should be sent to:

**Bucks Water Damage
1-800-WATER DAMAGE of Newtown
1801 Second Street pike
Richboro, PA 18954**

Ashley Perrone, IICRC WTR/ASD
Claims Manager
D: (215) 631-7000
O: (215) 586-7800
HIC: PA188567



1-800 Water Damage of Newtown

5116-26-0264-CLN2


5116-26-0264-CLN2

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
1. Respirator - Half face - multi-purpose resp. (per day)	10.00 DA	0.00	1.67	0.00	16.70
2. Respirator cartridge - HEPA & vapor & gas (per pair)	10.00 EA	0.00	36.63	0.00	366.30
3. Disposable rain suit	40.00 EA	0.00	16.96	0.00	678.40
4. Personal protective mask (N-95)	50.00 EA	0.00	1.50	0.00	75.00
--RUP (Total Labor Hours/8)					
5. Personal protective gloves - Disposable (per pair)	200.00 EA	0.00	0.42	0.00	84.00
---RUP = (Labor Hrs/8)*6 (pairs per day)					
6. Cleaning & Remediation - Supervisory - per hr	40.00 HR	0.00	78.88	0.00	3,155.20
---8*5 Days					
7. Scaffolding Setup & Take down - per hour	8.00 HR	0.00	59.10	0.00	472.80

8. Scaffold - per section (per day)	20.00 DA	0.00	27.74	0.00	554.80
---10 days for 2 tiers					
9. Fall protection harness and lanyard (per day)	20.00 DA	0.00	8.00	0.00	160.00
10. Haul debris - per pickup truck load - including dump fees	1.00 EA	223.31	0.00	0.00	223.31
Total: 5116-26-0264-CLN2				0.00	5,786.51

Source - Encircle 1

Main Level



Entryway

Height: 14' 11"

1,277.72 SF Walls	355.88 SF Ceiling
1,633.59 SF Walls & Ceiling	355.88 SF Floor
39.54 SY Flooring	85.66 LF Floor Perimeter
85.66 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
11. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18




1-800 Water Damage of Newtown

CONTINUED - Entryway

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
12. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
13. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
14. Add for HEPA filter (for canister/backpack vacuums)	0.25 EA	0.00	94.46	0.00	23.62
15. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
16. HEPA Vacuuming - Light - (PER SF)	1,989.47 SF	0.00	0.49	0.00	974.84
---WC+F					
17. Clean more than the walls and ceiling	3,267.19 SF	0.00	0.52	0.00	1,698.94
---WC*2					
18. Clean floor - Light	711.75 SF	0.00	0.40	0.00	284.70
---F*2					
19. Clean ductwork - Exterior (per LF)	135.00 LF	0.00	6.11	0.00	824.85
20. Clean door (per side)	2.00 EA	0.00	10.39	0.00	20.78
21. Clean door / window opening per EA (per side)	2.00 EA	0.00	18.82	0.00	37.64
22. Clean door hardware	2.00 EA	0.00	9.60	0.00	19.20
23. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
24. Clean light fixture	5.00 EA	0.00	15.32	0.00	76.60
25. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
26. Floor protection - heavy paper and tape	355.88 SF	0.00	0.48	0.00	170.82
27. Protect - Cover with plastic	1,277.72 SF	0.00	0.38	0.00	485.53
---protect cabinets and walls from overspray					
28. Corrosion mitigation of door hardware	2.00 EA	0.00	6.44	0.00	12.88
29. Corrosion mitigation of light fixture	5.00 EA	0.00	11.04	0.00	55.20
30. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	698.50 SF	0.00	1.48	0.00	1,033.78

CONTINUED - Entryway

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
---C + (PF*4)					
Height Add-ons					
31. Additional cost for high wall or ceiling - 11' to 14'	421.15 SF	0.00	0.06	0.00	25.27
---PF*4'11					
32. Additional cost for high wall or ceiling - 11' to 14'	342.63 SF	0.00	0.05	0.00	17.13
---PF*4					
33. Additional cost for high wall or ceiling - Over 14'	85.66 SF	0.00	0.10	0.00	8.57
--PF *1					
Totals: Entryway				0.00	6,227.17



Stair Hall

Height: 14' 11"

1,099.36 SF Walls	297.68 SF Ceiling
1,397.04 SF Walls & Ceiling	297.68 SF Floor
33.08 SY Flooring	73.70 LF Floor Perimeter
73.70 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
34. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
35. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
36. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
37. Add for HEPA filter (for canister/backpack vacuums)	0.25 EA	0.00	94.46	0.00	23.62
38. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
39. HEPA Vacuuming - Light - (PER SF)	1,694.72 SF	0.00	0.49	0.00	830.41
---WC+F					




1-800 Water Damage of Newtown

CONTINUED - Stair Hall

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
40. Clean more than the walls and ceiling	2,794.08 SF	0.00	0.52	0.00	1,452.92
---WC*2					
41. Clean floor - Light	595.36 SF	0.00	0.40	0.00	238.14
---F*2					
42. Clean door (per side)	4.00 EA	0.00	10.39	0.00	41.56
43. Clean door / window opening per EA (per side)	2.00 EA	0.00	18.82	0.00	37.64
44. Clean door hardware	4.00 EA	0.00	9.60	0.00	38.40
45. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
46. Clean light fixture	2.00 EA	0.00	15.32	0.00	30.64
47. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
48. Floor protection - heavy paper and tape	297.68 SF	0.00	0.48	0.00	142.89
49. Protect - Cover with plastic	1,099.36 SF	0.00	0.38	0.00	417.76
---protect cabinets and walls from overspray					
50. Corrosion mitigation of door hardware	4.00 EA	0.00	6.44	0.00	25.76
51. Corrosion mitigation of light fixture	2.00 EA	0.00	11.04	0.00	22.08
52. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	592.48 SF	0.00	1.48	0.00	876.87
---C + (PF*4)					
Height Add-ons					
53. Additional cost for high wall or ceiling - 11' to 14'	362.36 SF	0.00	0.06	0.00	21.74
---PF*4'11					
54. Additional cost for high wall or ceiling - 11' to 14'	294.80 SF	0.00	0.05	0.00	14.74
---PF*4					
55. Additional cost for high wall or ceiling - Over 14'	73.70 SF	0.00	0.10	0.00	7.37
--PF *1					
Totals: Stair Hall				0.00	4,679.36




1-800 Water Damage of Newtown



Stairs1

Height: 14' 11"

361.97 SF Walls	65.84 SF Ceiling
427.81 SF Walls & Ceiling	65.84 SF Floor
7.32 SY Flooring	24.27 LF Floor Perimeter
24.27 LF Ceil. Perimeter	



Subroom: Stairs (1)

Height: 23' 8"

468.82 SF Walls	65.51 SF Ceiling
534.33 SF Walls & Ceiling	115.86 SF Floor
12.87 SY Flooring	29.32 LF Floor Perimeter
24.34 LF Ceil. Perimeter	

Missing Wall


5' 7" X 23' 7 15/16"

Opens into Exterior

Missing Wall

5' 5 1/8" X 23' 7 15/16"

Opens into STAIRS1



Subroom: Stairs2 (2)

Height: 23' 8"

466.77 SF Walls	51.89 SF Ceiling
518.66 SF Walls & Ceiling	92.06 SF Floor
10.23 SY Flooring	29.18 LF Floor Perimeter
24.16 LF Ceil. Perimeter	

Missing Wall


4' 3 7/8" X 23' 7 15/16"

Opens into STAIRS1

Missing Wall

4' 3 7/8" X 23' 7 15/16"

Opens into STAIRS3



Subroom: Stairs3 (3)

Height: 14' 11"

427.56 SF Walls	56.70 SF Ceiling
484.27 SF Walls & Ceiling	56.70 SF Floor
6.30 SY Flooring	28.66 LF Floor Perimeter
28.66 LF Ceil. Perimeter	

Missing Wall

4' 3 7/8" X 14' 11"

Opens into STAIRS2

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
-------------	-----	--------	---------	-----	-------

EQUIPMENT

56. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
--	---------	------	-------	------	-------


*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.



1-800 Water Damage of Newtown

CONTINUED - Stairs1

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
57. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
58. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
59. Add for HEPA filter (for canister/backpack vacuums)	0.25 EA	0.00	94.46	0.00	23.62
60. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
61. Clean concrete step	27.00 EA	0.00	8.33	0.00	224.91
62. Clean floor - Light	242.00 SF	0.00	0.40	0.00	96.80
---Both landings 170+(12*6)					
63. Clean handrail - wall mounted	24.50 LF	0.00	0.76	0.00	18.62
--- 12'3*2					
64. Clean iron handrail	27.00 LF	0.00	3.80	0.00	102.60
--- 12'3+12'3+1'3+1'3 . Clean the railing with spindles and balusters					
65. HEPA Vacuuming - Light - (PER SF)	2,055.59 SF	0.00	0.49	0.00	1,007.24
---W+F					
66. Clean more than the walls	3,450.26 SF	0.00	0.52	0.00	1,794.14
---W*2					
67. Clean window unit (per side) 10 - 20 SF	3.00 EA	0.00	21.81	0.00	65.43
Height Add-ons					
68. Additional cost for high wall or ceiling - 11' to 14'	547.84 SF	0.00	0.06	0.00	32.87
---PF*4'11					
Totals: Stairs1				0.00	3,753.04




Girls Bathroom

Height: 14' 11"

618.35 SF Walls	121.90 SF Ceiling
740.24 SF Walls & Ceiling	121.90 SF Floor
13.54 SY Flooring	41.45 LF Floor Perimeter
41.45 LF Ceil. Perimeter	



CONTINUED - Girls Bathroom



Subroom: Girls WC Hallway (1)

Height: 14' 11"

720.33 SF Walls	110.36 SF Ceiling
830.68 SF Walls & Ceiling	110.36 SF Floor
12.26 SY Flooring	46.14 LF Floor Perimeter
50.02 LF Ceil. Perimeter	

Missing Wall - Goes to Floor

3' 10 9/16" X 6' 8"

Opens into Exterior

Missing Wall

6' 9 13/16" X 14' 11"

Opens into GIRLS_BATHRO

Missing Wall

0" X 14' 11"

Opens into GIRLS_BATHRO

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
69. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
70. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
71. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
72. Add for HEPA filter (for canister/backpack vacuums)	0.25 EA	0.00	94.46	0.00	23.62
73. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
74. HEPA Vacuuming - Light - (PER SF)	1,803.18 SF	0.00	0.49	0.00	883.56
---WC+F					
75. Clean more than the walls and ceiling	3,141.85 SF	0.00	0.52	0.00	1,633.76
---WC*2					
76. Clean floor - Light	464.50 SF	0.00	0.40	0.00	185.80
---F*2					
77. Clean ductwork - Exterior (per LF)	120.00 LF	0.00	6.11	0.00	733.20
78. Clean door (per side)	1.00 EA	0.00	10.39	0.00	10.39
79. Clean door / window opening per EA (per side)	1.00 EA	0.00	18.82	0.00	18.82
80. Clean countertop	17.33 SF	0.00	1.07	0.00	18.54
81. Clean door hardware	1.00 EA	0.00	9.60	0.00	9.60




1-800 Water Damage of Newtown

CONTINUED - Girls Bathroom

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
82. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
83. Clean light fixture	16.00 EA	0.00	15.32	0.00	245.12
84. Clean toilet seat	4.00 EA	0.00	6.82	0.00	27.28
85. Clean toilet	4.00 EA	0.00	31.61	0.00	126.44
86. Clean toilet partition - per stall	4.00 EA	0.00	38.16	0.00	152.64
87. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
88. Floor protection - heavy paper and tape	232.25 SF	0.00	0.48	0.00	111.48
89. Protect - Cover with plastic	1,338.67 SF	0.00	0.38	0.00	508.69
---protect cabinets and walls from overspray					
90. Corrosion mitigation of door hardware	1.00 EA	0.00	6.44	0.00	6.44
91. Corrosion mitigation of light fixture	16.00 EA	0.00	11.04	0.00	176.64
92. Corrosion mitigation of countertop	80.00 SF	0.00	0.71	0.00	56.80
93. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	582.64 SF	0.00	1.48	0.00	862.31
---C + (PF*4)					
Height Add-ons					
94. Additional cost for high wall or ceiling - 11' to 14'	430.68 SF	0.00	0.06	0.00	25.84
---PF*4*11					
95. Additional cost for high wall or ceiling - 11' to 14'	350.39 SF	0.00	0.05	0.00	17.52
---PF*4					
96. Additional cost for high wall or ceiling - Over 14'	87.60 SF	0.00	0.10	0.00	8.76
--PF *1					
Totals: Girls Bathroom				0.00	6,300.07



1-800 Water Damage of Newtown



C126

Height: 14' 11"

1,698.20 SF Walls	805.20 SF Ceiling
2,503.40 SF Walls & Ceiling	805.20 SF Floor
89.47 SY Flooring	113.85 LF Floor Perimeter
113.85 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
97. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
98. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
99. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
100. Add for HEPA filter (for canister/backpack vacuums)	0.50 EA	0.00	94.46	0.00	47.23
101. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
102. HEPA Vacuuming - Light - (PER SF)	1,654.30 SF	0.00	0.49	0.00	810.61
---(WC+F)/2. Half the area affected					
103. Clean part of the walls and ceiling	1,251.70 SF	0.00	0.52	0.00	650.88
---WC*2					
104. Clean floor - Light	402.60 SF	0.00	0.40	0.00	161.04
---F*2					
105. Clean ductwork - Exterior (per LF)	67.50 LF	0.00	6.11	0.00	412.43
106. Clean door (per side)	1.00 EA	0.00	10.39	0.00	10.39
107. Clean window unit (per side) 10 - 20 SF	2.00 EA	0.00	21.81	0.00	43.62
108. Clean door / window opening per EA (per side)	3.00 EA	0.00	18.82	0.00	56.46
109. Clean cabinetry - upper - inside and out	8.00 LF	0.00	21.32	0.00	170.56
110. Clean countertop	16.00 SF	0.00	1.07	0.00	17.12
111. Clean cabinetry - lower - inside and out	8.00 LF	0.00	21.32	0.00	170.56
112. Clean door hardware	1.00 EA	0.00	9.60	0.00	9.60




1-800 Water Damage of Newtown

CONTINUED - C126

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
113. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
114. Clean light fixture	8.00 EA	0.00	15.32	0.00	122.56
115. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
116. Floor protection - heavy paper and tape	402.60 SF	0.00	0.48	0.00	193.25
117. Protect - Cover with plastic	849.10 SF	0.00	0.38	0.00	322.66
---protect cabinets and walls from overspray					
118. Corrosion mitigation of window unit (per side) 10 - 20 SF	2.00 EA	0.00	14.55	0.00	29.10
119. Corrosion mitigation of door hardware	1.00 EA	0.00	6.44	0.00	6.44
120. Corrosion mitigation of light fixture	16.00 EA	0.00	11.04	0.00	176.64
121. Corrosion mitigation of countertop	80.00 SF	0.00	0.71	0.00	56.80
122. Seal part of the ceiling with fungicidal/bacterial inhibitor - one coat	630.29 SF	0.00	1.48	0.00	932.83
---C + (PF*4)					
Height Add-ons					
123. Additional cost for high wall or ceiling - 11' to 14'	279.87 SF	0.00	0.06	0.00	16.79
---PF*4*11					
124. Additional cost for high wall or ceiling - 11' to 14'	227.69 SF	0.00	0.05	0.00	11.38
---PF*4					
125. Additional cost for high wall or ceiling - Over 14'	56.92 SF	0.00	0.10	0.00	5.69
--PF *1					
Totals: C126				0.00	4,891.46



1-800 Water Damage of Newtown



C 130

Height: 14' 11"

1,803.69 SF Walls	942.94 SF Ceiling
2,746.64 SF Walls & Ceiling	942.94 SF Floor
104.77 SY Flooring	120.92 LF Floor Perimeter
120.92 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
-------------	-----	--------	---------	-----	-------

*****EQUIPMENT*****

126. Equipment setup, take down, and monitoring (hourly charge)	0.67 HR	0.00	76.31	0.00	51.13
---	---------	------	-------	------	-------

***** REGULAR HOURS: 2 pieces of equipment for set up at 10 minutes per (2*10/60) = .333 hours. 2 pieces of equipment for take down at 10 minutes per (2*10/60) = .333 hours.**

127. Deodorization chamber - Ozone treatment	14,065. CF 57	0.00	0.11	0.00	1,547.21
128. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56

---Reflects 1 scrubber for 3 days

129. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
130. Add for HEPA filter (for canister/backpack vacuums)	0.50 EA	0.00	94.46	0.00	47.23
131. Equipment decontamination charge - per piece of equipment	2.00 EA	0.00	45.19	0.00	90.38

*****CLEAN*****

132. HEPA Vacuuming - Light - (PER SF)	2,746.64 SF	0.00	0.49	0.00	1,345.85
--	-------------	------	------	------	----------

---W+F. NO CEILINGS INCLUDED

133. Clean more than the walls	3,607.39 SF	0.00	0.52	0.00	1,875.84
--------------------------------	-------------	------	------	------	----------

---W*2

134. Clean floor - Light	1,885.89 SF	0.00	0.40	0.00	754.36
--------------------------	-------------	------	------	------	--------

---F*2

135. Clean ductwork - Exterior (per LF)	135.00 LF	0.00	6.11	0.00	824.85
136. Clean door (per side)	1.00 EA	0.00	10.39	0.00	10.39
137. Clean window unit (per side) 10 - 20 SF	9.00 EA	0.00	21.81	0.00	196.29
138. Clean door / window opening per EA (per side)	10.00 EA	0.00	18.82	0.00	188.20
139. Clean cabinetry - upper - inside and out	12.00 LF	0.00	21.32	0.00	255.84
140. Clean countertop	12.00 SF	0.00	1.07	0.00	12.84
141. Clean cabinetry - lower - inside and out	6.00 LF	0.00	21.32	0.00	127.92




1-800 Water Damage of Newtown

CONTINUED - C 130

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
142. Clean door hardware	1.00 EA	0.00	9.60	0.00	9.60
143. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
144. Clean light fixture	16.00 EA	0.00	15.32	0.00	245.12
145. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
146. Floor protection - heavy paper and tape	942.94 SF	0.00	0.48	0.00	452.61
147. Protect - Cover with plastic	901.85 SF	0.00	0.38	0.00	342.70
---protect cabinets and walls from overspray					
148. Corrosion mitigation of window unit (per side) 10 - 20 SF	9.00 EA	0.00	14.55	0.00	130.95
149. Corrosion mitigation of door hardware	1.00 EA	0.00	6.44	0.00	6.44
150. Corrosion mitigation of light fixture	16.00 EA	0.00	11.04	0.00	176.64
151. Corrosion mitigation of countertop	12.00 SF	0.00	0.71	0.00	8.52
152. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	1,426.62 SF	0.00	1.48	0.00	2,111.40
---C + (PF*4)					
Height Add-ons					
153. Additional cost for high wall or ceiling - 11' to 14'	594.51 SF	0.00	0.06	0.00	35.67
---PF*4*11					
154. Additional cost for high wall or ceiling - 11' to 14'	483.67 SF	0.00	0.05	0.00	24.18
---PF*4					
155. Additional cost for high wall or ceiling - Over 14'	120.92 SF	0.00	0.10	0.00	12.09
--PF *1					
Totals: C 130				0.00	11,270.70



1-800 Water Damage of Newtown



C 131

Height: 14' 11"

1,835.34 SF Walls	918.38 SF Ceiling
2,753.72 SF Walls & Ceiling	918.38 SF Floor
102.04 SY Flooring	123.04 LF Floor Perimeter
123.04 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
-------------	-----	--------	---------	-----	-------

EQUIPMENT

156. Equipment setup, take down, and monitoring (hourly charge) 0.33 HR 0.00 76.31 0.00 25.18

*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.

157. Negative air fan/Air scrubber (24 hr period) - No monit. 3.00 DA 0.00 73.52 0.00 220.56

---Reflects 1 scrubber for 3 days

158. Add for HEPA filter (for negative air exhaust fan) 0.45 EA 0.00 213.07 0.00 95.88

159. Add for HEPA filter (for canister/backpack vacuums) 0.50 EA 0.00 94.46 0.00 47.23

160. Equipment decontamination charge - per piece of equipment 1.00 EA 0.00 45.19 0.00 45.19

CLEAN

161. HEPA Vacuuming - Light - (PER SF) 3,672.10 SF 0.00 0.49 0.00 1,799.33

---WC+F

162. Clean more than the walls and ceiling 5,507.44 SF 0.00 0.52 0.00 2,863.87

---WC*2

163. Clean floor - Light 1,836.76 SF 0.00 0.40 0.00 734.70

---F*2

164. Clean ductwork - Exterior (per LF) 135.00 LF 0.00 6.11 0.00 824.85

165. Clean door (per side) 1.00 EA 0.00 10.39 0.00 10.39

166. Clean window unit (per side) 10 - 20 SF 7.00 EA 0.00 21.81 0.00 152.67

167. Clean door / window opening per EA (per side) 8.00 EA 0.00 18.82 0.00 150.56

168. Clean cabinetry - upper - inside and out 6.00 LF 0.00 21.32 0.00 127.92

169. Clean door hardware 1.00 EA 0.00 9.60 0.00 9.60

170. Clean smoke/carbon monoxide detector 1.00 EA 0.00 9.05 0.00 9.05


171. Clean light fixture 16.00 EA 0.00 15.32 0.00 245.12



1-800 Water Damage of Newtown

CONTINUED - C 131

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
172. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
173. Floor protection - heavy paper and tape	918.38 SF	0.00	0.48	0.00	440.82
174. Protect - Cover with plastic	1,835.34 SF	0.00	0.38	0.00	697.43
---protect cabinets and walls from overspray					
175. Corrosion mitigation of window unit (per side) 10 - 20 SF	7.00 EA	0.00	14.55	0.00	101.85
176. Corrosion mitigation of door hardware	1.00 EA	0.00	6.44	0.00	6.44
177. Corrosion mitigation of light fixture	16.00 EA	0.00	11.04	0.00	176.64
178. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	1,410.54 SF	0.00	1.48	0.00	2,087.60
---C + (PF*4)					
Height Add-ons					
179. Additional cost for high wall or ceiling - 11' to 14'	604.94 SF	0.00	0.06	0.00	36.30
---PF*4'11					
180. Additional cost for high wall or ceiling - 11' to 14'	492.16 SF	0.00	0.05	0.00	24.61
---PF*4					
181. Additional cost for high wall or ceiling - Over 14'	123.04 SF	0.00	0.10	0.00	12.30
--PF *1					
Totals: C 131				0.00	11,007.05



C 132

Height: 14' 11"

1,845.66 SF Walls	929.85 SF Ceiling
2,775.50 SF Walls & Ceiling	929.85 SF Floor
103.32 SY Flooring	123.73 LF Floor Perimeter
123.73 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					



1-800 Water Damage of Newtown

CONTINUED - C 132


DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
182. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
183. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
184. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
185. Add for HEPA filter (for canister/backpack vacuums)	0.50 EA	0.00	94.46	0.00	47.23
186. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
187. HEPA Vacuuming - Light - (PER SF)	3,705.35 SF	0.00	0.49	0.00	1,815.62
---WC+F					
188. Clean more than the walls and ceiling	5,551.01 SF	0.00	0.52	0.00	2,886.53
---WC*2					
189. Clean floor - Light	1,859.70 SF	0.00	0.40	0.00	743.88
---F*2					
190. Clean ductwork - Exterior (per LF)	135.00 LF	0.00	6.11	0.00	824.85
191. Clean door (per side)	1.00 EA	0.00	10.39	0.00	10.39
192. Clean window unit (per side) 10 - 20 SF	7.00 EA	0.00	21.81	0.00	152.67
193. Clean door / window opening per EA (per side)	8.00 EA	0.00	18.82	0.00	150.56
194. Clean cabinetry - upper - inside and out	6.00 LF	0.00	21.32	0.00	127.92
195. Clean door hardware	1.00 EA	0.00	9.60	0.00	9.60
196. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
197. Clean light fixture	16.00 EA	0.00	15.32	0.00	245.12
198. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
199. Floor protection - heavy paper and tape	929.85 SF	0.00	0.48	0.00	446.33
200. Protect - Cover with plastic	1,845.66 SF	0.00	0.38	0.00	701.35



1-800 Water Damage of Newtown

CONTINUED - C 132

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
---protect cabinets and walls from overspray					
201. Corrosion mitigation of window unit (per side) 10 - 20 SF	7.00 EA	0.00	14.55	0.00	101.85
202. Corrosion mitigation of door hardware	1.00 EA	0.00	6.44	0.00	6.44
203. Corrosion mitigation of light fixture	16.00 EA	0.00	11.04	0.00	176.64
204. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	1,424.77 SF	0.00	1.48	0.00	2,108.66
---C + (PF*4)					
Height Add-ons					
205. Additional cost for high wall or ceiling - 11' to 14'	608.34 SF	0.00	0.06	0.00	36.50
---PF*4*11					
206. Additional cost for high wall or ceiling - 11' to 14'	494.92 SF	0.00	0.05	0.00	24.75
---PF*4					
207. Additional cost for high wall or ceiling - Over 14'	123.73 SF	0.00	0.10	0.00	12.37
--PF *1					
Totals: C 132				0.00	11,086.08



C 133

Height: 14' 11"

1,446.97 SF Walls	561.61 SF Ceiling
2,008.58 SF Walls & Ceiling	561.61 SF Floor
62.40 SY Flooring	97.00 LF Floor Perimeter
97.00 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
208. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
209. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
210. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88




1-800 Water Damage of Newtown

CONTINUED - C 133

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
211. Add for HEPA filter (for canister/backpack vacuums)	0.50 EA	0.00	94.46	0.00	47.23
212. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
213. HEPA Vacuuming - Light - (PER SF)	2,570.19 SF	0.00	0.49	0.00	1,259.39
---WC+F					
214. Clean more than the walls and ceiling	4,017.16 SF	0.00	0.52	0.00	2,088.92
---WC*2					
215. Clean floor - Light	1,123.22 SF	0.00	0.40	0.00	449.29
---F*2					
216. Clean ductwork - Exterior (per LF)	135.00 LF	0.00	6.11	0.00	824.85
217. Clean door (per side)	1.00 EA	0.00	10.39	0.00	10.39
218. Clean window unit (per side) 10 - 20 SF	3.00 EA	0.00	21.81	0.00	65.43
219. Clean door / window opening per EA (per side)	4.00 EA	0.00	18.82	0.00	75.28
220. Clean cabinetry - upper - inside and out	20.00 LF	0.00	21.32	0.00	426.40
221. Clean door hardware	1.00 EA	0.00	9.60	0.00	9.60
222. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
223. Clean light fixture	16.00 EA	0.00	15.32	0.00	245.12
224. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
225. Floor protection - heavy paper and tape	561.61 SF	0.00	0.48	0.00	269.57
226. Protect - Cover with plastic	1,446.97 SF	0.00	0.38	0.00	549.85
---protect cabinets and walls from overspray					
227. Corrosion mitigation of window unit (per side) 10 - 20 SF	3.00 EA	0.00	14.55	0.00	43.65
228. Corrosion mitigation of door hardware	1.00 EA	0.00	6.44	0.00	6.44
229. Corrosion mitigation of light fixture	16.00 EA	0.00	11.04	0.00	176.64
230. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	949.62 SF	0.00	1.48	0.00	1,405.44



DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
---C + (PF*4)					
Height Add-ons					
231. Additional cost for high wall or ceiling - 11' to 14'	476.93 SF	0.00	0.06	0.00	28.62
---PF*4'11					
232. Additional cost for high wall or ceiling - 11' to 14'	388.01 SF	0.00	0.05	0.00	19.40
---PF*4					
233. Additional cost for high wall or ceiling - Over 14'	97.00 SF	0.00	0.10	0.00	9.70
--PF *1					
Totals: C 133				0.00	8,468.03



Height: 14' 11"

1,819.86 SF Walls	912.37 SF Ceiling
2,732.23 SF Walls & Ceiling	912.37 SF Floor
101.37 SY Flooring	122.00 LF Floor Perimeter
122.00 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
234. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
235. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
236. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
237. Add for HEPA filter (for canister/backpack vacuums)	0.50 EA	0.00	94.46	0.00	47.23
238. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
239. HEPA Vacuuming - Light - (PER SF)	3,644.60 SF	0.00	0.49	0.00	1,785.85
---WC+F					




1-800 Water Damage of Newtown

CONTINUED - C 134

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
240. Clean more than the walls and ceiling	5,464.46 SF	0.00	0.52	0.00	2,841.52
---WC*2					
241. Clean floor - Light	1,824.74 SF	0.00	0.40	0.00	729.90
---F*2					
242. Clean ductwork - Exterior (per LF)	135.00 LF	0.00	6.11	0.00	824.85
243. Clean door (per side)	1.00 EA	0.00	10.39	0.00	10.39
244. Clean window unit (per side) 10 - 20 SF	7.00 EA	0.00	21.81	0.00	152.67
245. Clean door / window opening per EA (per side)	1.00 EA	0.00	18.82	0.00	18.82
246. Clean cabinetry - upper - inside and out	20.00 LF	0.00	21.32	0.00	426.40
247. Clean cabinetry - lower - inside and out	12.00 LF	0.00	21.32	0.00	255.84
248. Clean door hardware	1.00 EA	0.00	9.60	0.00	9.60
249. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
250. Clean light fixture	16.00 EA	0.00	15.32	0.00	245.12
251. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
252. Floor protection - heavy paper and tape	912.37 SF	0.00	0.48	0.00	437.94
253. Protect - Cover with plastic	1,819.86 SF	0.00	0.38	0.00	691.55
---protect cabinets and walls from overspray					
254. Corrosion mitigation of window unit (per side) 10 - 20 SF	1.00 EA	0.00	14.55	0.00	14.55
255. Corrosion mitigation of door hardware	1.00 EA	0.00	6.44	0.00	6.44
256. Corrosion mitigation of light fixture	16.00 EA	0.00	11.04	0.00	176.64
257. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	1,400.38 SF	0.00	1.48	0.00	2,072.56
---C + (PF*4)					
Height Add-ons					
258. Additional cost for high wall or ceiling - 11' to 14'	599.84 SF	0.00	0.06	0.00	35.99
---PF*4'11					



DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
259. Additional cost for high wall or ceiling - 11' to 14'	488.01 SF	0.00	0.05	0.00	24.40
---PF*4					
260. Additional cost for high wall or ceiling - Over 14'	122.00 SF	0.00	0.10	0.00	12.20
--PF *1					
Totals: C 134				0.00	11,277.28



2,055.94	SF Walls	1,175.72	SF Ceiling
3,231.66	SF Walls & Ceiling	1,175.72	SF Floor
130.64	SY Flooring	137.83	LF Floor Perimeter
137.83	LF Ceil. Perimeter		

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
261. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
262. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
263. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
264. Add for HEPA filter (for canister/backpack vacuums)	0.50 EA	0.00	94.46	0.00	47.23
265. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
266. HEPA Vacuuming - Light - (PER SF)	4,407.38 SF	0.00	0.49	0.00	2,159.62
---WC+F					
267. Clean more than the walls and ceiling	6,463.32 SF	0.00	0.52	0.00	3,360.93
---WC*2					
268. Clean floor - Light	2,351.44 SF	0.00	0.40	0.00	940.58
---F*2					




1-800 Water Damage of Newtown

CONTINUED - C 135 Staff Planning

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
269. Clean ductwork - Exterior (per LF)	135.00 LF	0.00	6.11	0.00	824.85
270. Clean door (per side)	4.00 EA	0.00	10.39	0.00	41.56
271. Clean window unit (per side) 10 - 20 SF	13.00 EA	0.00	21.81	0.00	283.53
272. Clean door / window opening per EA (per side)	15.00 EA	0.00	18.82	0.00	282.30
273. Clean cabinetry - upper - inside and out	20.00 LF	0.00	21.32	0.00	426.40
274. Clean door hardware	4.00 EA	0.00	9.60	0.00	38.40
275. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
276. Clean light fixture	5.00 EA	0.00	15.32	0.00	76.60
277. Cleaning Technician - incl. cleaning agent - per hour	2.00 HR	0.00	60.96	0.00	121.92
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
278. Floor protection - heavy paper and tape	1,175.72 SF	0.00	0.48	0.00	564.35
279. Protect - Cover with plastic	2,055.94 SF	0.00	0.38	0.00	781.26
---protect cabinets and walls from overspray					
280. Corrosion mitigation of window unit (per side) 10 - 20 SF	13.00 EA	0.00	14.55	0.00	189.15
281. Corrosion mitigation of door hardware	2.00 EA	0.00	6.44	0.00	12.88
282. Corrosion mitigation of light fixture	5.00 EA	0.00	11.04	0.00	55.20
283. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	1,727.03 SF	0.00	1.48	0.00	2,556.00
---C + (PF*4)					
Height Add-ons					
284. Additional cost for high wall or ceiling - 11' to 14'	677.65 SF	0.00	0.06	0.00	40.66
---PF*4'11					
285. Additional cost for high wall or ceiling - 11' to 14'	551.31 SF	0.00	0.05	0.00	27.57
---PF*4					
286. Additional cost for high wall or ceiling - Over 14'	137.83 SF	0.00	0.10	0.00	13.78
--PF *1					
Totals: C 135 Staff Planning				0.00	13,240.63



1-800 Water Damage of Newtown



135 A

Height: 14' 11"

756.50 SF Walls	153.77 SF Ceiling
910.27 SF Walls & Ceiling	153.77 SF Floor
17.09 SY Flooring	50.72 LF Floor Perimeter
50.72 LF Ceil. Perimeter	


DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
287. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
288. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
289. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
290. Add for HEPA filter (for canister/backpack vacuums)	0.25 EA	0.00	94.46	0.00	23.62
291. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
292. HEPA Vacuuming - Light - (PER SF)	1,064.04 SF	0.00	0.49	0.00	521.38
---WC+F					
293. Clean more than the walls and ceiling	1,820.54 SF	0.00	0.52	0.00	946.68
---WC*2					
294. Clean floor - Light	307.54 SF	0.00	0.40	0.00	123.02
---F*2					
295. Clean ductwork - Exterior (per LF)	13.00 LF	0.00	6.11	0.00	79.43
296. Clean door (per side)	1.00 EA	0.00	10.39	0.00	10.39
297. Clean door / window opening per EA (per side)	1.00 EA	0.00	18.82	0.00	18.82
298. Clean stereo - components - speakers - exterior wipe down	1.00 EA	0.00	15.69	0.00	15.69
299. Clean door hardware	1.00 EA	0.00	9.60	0.00	9.60
300. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
301. Clean light fixture	6.00 EA	0.00	15.32	0.00	91.92
302. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
5116-26-0264-CLN2				7/30/2026	Page: 24



1-800 Water Damage of Newtown

CONTINUED - 135 A

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
303. Floor protection - heavy paper and tape	153.77 SF	0.00	0.48	0.00	73.81
304. Protect - Cover with plastic	756.50 SF	0.00	0.38	0.00	287.47
---protect cabinets and walls from overspray					
305. Corrosion mitigation of window unit (per side) 10 - 20 SF	1.00 EA	0.00	14.55	0.00	14.55
306. Corrosion mitigation of door hardware	1.00 EA	0.00	6.44	0.00	6.44
307. Corrosion mitigation of light fixture	6.00 EA	0.00	11.04	0.00	66.24
308. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	356.63 SF	0.00	1.48	0.00	527.81
---C + (PF*4)					
Height Add-ons					
309. Additional cost for high wall or ceiling - 11' to 14'	249.35 SF	0.00	0.06	0.00	14.96
---PF*4'11					
310. Additional cost for high wall or ceiling - 11' to 14'	202.86 SF	0.00	0.05	0.00	10.14
---PF*4					
311. Additional cost for high wall or ceiling - Over 14'	50.72 SF	0.00	0.10	0.00	5.07
--PF *1					
Totals: 135 A				0.00	3,303.86



135 B

Height: 14' 11"

712.46 SF Walls	138.95 SF Ceiling
851.41 SF Walls & Ceiling	138.95 SF Floor
15.44 SY Flooring	47.76 LF Floor Perimeter
47.76 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
312. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18



1-800 Water Damage of Newtown

CONTINUED - 135 B


DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
313. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
314. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
315. Add for HEPA filter (for canister/backpack vacuums)	0.25 EA	0.00	94.46	0.00	23.62
316. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
317. HEPA Vacuuming - Light - (PER SF)	990.36 SF	0.00	0.49	0.00	485.28
---WC+F					
318. Clean more than the walls and ceiling	1,702.82 SF	0.00	0.52	0.00	885.47
---WC*2					
319. Clean floor - Light	277.90 SF	0.00	0.40	0.00	111.16
---F*2					
320. Clean ductwork - Exterior (per LF)	13.00 LF	0.00	6.11	0.00	79.43
321. Clean door (per side)	1.00 EA	0.00	10.39	0.00	10.39
322. Clean window unit (per side) 10 - 20 SF	7.00 EA	0.00	21.81	0.00	152.67
323. Clean door / window opening per EA (per side)	8.00 EA	0.00	18.82	0.00	150.56
324. Clean stereo - components - speakers - exterior wipe down	1.00 EA	0.00	15.69	0.00	15.69
325. Clean door hardware	1.00 EA	0.00	9.60	0.00	9.60
326. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
327. Clean light fixture	4.00 EA	0.00	15.32	0.00	61.28
328. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
329. Floor protection - heavy paper and tape	138.95 SF	0.00	0.48	0.00	66.70
330. Protect - Cover with plastic	712.46 SF	0.00	0.38	0.00	270.73
---protect cabinets and walls from overspray					



1-800 Water Damage of Newtown

CONTINUED - 135 B

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
331. Corrosion mitigation of window unit (per side) 10 - 20 SF	7.00 EA	0.00	14.55	0.00	101.85
332. Corrosion mitigation of door hardware	1.00 EA	0.00	6.44	0.00	6.44
333. Corrosion mitigation of light fixture	4.00 EA	0.00	11.04	0.00	44.16
334. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	330.00 SF	0.00	1.48	0.00	488.40
---C + (PF*4)					
Height Add-ons					
335. Additional cost for high wall or ceiling - 11' to 14'	234.83 SF	0.00	0.06	0.00	14.09
---PF*4'11					
336. Additional cost for high wall or ceiling - 11' to 14'	191.05 SF	0.00	0.05	0.00	9.55
---PF*4					
337. Additional cost for high wall or ceiling - Over 14'	47.76 SF	0.00	0.10	0.00	4.78
--PF *1					
Totals: 135 B				0.00	3,448.67



C-137 Janitor's HALL

Height: 14' 11"

488.55 SF Walls	61.79 SF Ceiling
550.34 SF Walls & Ceiling	61.79 SF Floor
6.87 SY Flooring	32.75 LF Floor Perimeter
32.75 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
338. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
339. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
340. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88



1-800 Water Damage of Newtown

CONTINUED - C-137 Janitor's HALL

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
341. Add for HEPA filter (for canister/backpack vacuums)	0.50 EA	0.00	94.46	0.00	47.23
342. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
343. HEPA Vacuuming - Light - (PER SF)	612.13 SF	0.00	0.49	0.00	299.94
---WC+F					
344. Clean more than the walls and ceiling	1,100.67 SF	0.00	0.52	0.00	572.35
---WC*2					
345. Clean floor - Light	123.58 SF	0.00	0.40	0.00	49.43
---F*2					
346. Clean ductwork - Exterior (per LF)	13.00 LF	0.00	6.11	0.00	79.43
347. Clean door (per side)	2.00 EA	0.00	10.39	0.00	20.78
348. Clean door / window opening per EA (per side)	2.00 EA	0.00	18.82	0.00	37.64
349. Clean door hardware	2.00 EA	0.00	9.60	0.00	19.20
350. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
351. Clean light fixture	4.00 EA	0.00	15.32	0.00	61.28
352. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
353. Floor protection - heavy paper and tape	61.79 SF	0.00	0.48	0.00	29.66
354. Protect - Cover with plastic	488.55 SF	0.00	0.38	0.00	185.65
---protect cabinets and walls from overspray					
355. Corrosion mitigation of door hardware	2.00 EA	0.00	6.44	0.00	12.88
356. Corrosion mitigation of light fixture	4.00 EA	0.00	11.04	0.00	44.16
357. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	192.80 SF	0.00	1.48	0.00	285.34
---C + (PF*4)					
Height Add-ons					
358. Additional cost for high wall or ceiling - 11' to 14'	161.03 SF	0.00	0.06	0.00	9.66
---PF*4'11					




1-800 Water Damage of Newtown

CONTINUED - C-137 Janitor's HALL

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
359. Additional cost for high wall or ceiling - 11' to 14'	131.01 SF	0.00	0.05	0.00	6.55
---PF*4					
360. Additional cost for high wall or ceiling - Over 14'	32.75 SF	0.00	0.10	0.00	3.28
--PF *1					
Totals: C-137 Janitor's HALL				0.00	2,221.28

C 137 A

Height: 14' 11"



401.39 SF Walls	45.54 SF Ceiling
446.93 SF Walls & Ceiling	45.54 SF Floor
5.06 SY Flooring	26.91 LF Floor Perimeter
26.91 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
361. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
362. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
363. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
364. Add for HEPA filter (for canister/backpack vacuums)	0.25 EA	0.00	94.46	0.00	23.62
365. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
366. HEPA Vacuuming - Light - (PER SF)	492.47 SF	0.00	0.49	0.00	241.31
---WC+F					
367. Clean more than the walls and ceiling	893.86 SF	0.00	0.52	0.00	464.81
---WC*2					
368. Clean floor - Light	91.08 SF	0.00	0.40	0.00	36.43
---F*2					




1-800 Water Damage of Newtown

CONTINUED - C 137 A

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
369. Clean ductwork - Exterior (per LF)	7.00 LF	0.00	6.11	0.00	42.77
370. Clean door (per side)	2.00 EA	0.00	10.39	0.00	20.78
371. Clean door / window opening per EA (per side)	2.00 EA	0.00	18.82	0.00	37.64
372. Clean door hardware	2.00 EA	0.00	9.60	0.00	19.20
373. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
374. Clean light fixture	4.00 EA	0.00	15.32	0.00	61.28
375. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
376. Floor protection - heavy paper and tape	45.54 SF	0.00	0.48	0.00	21.86
377. Protect - Cover with plastic	401.39 SF	0.00	0.38	0.00	152.53
---protect cabinets and walls from overspray					
378. Corrosion mitigation of door hardware	2.00 EA	0.00	6.44	0.00	12.88
379. Corrosion mitigation of light fixture	4.00 EA	0.00	11.04	0.00	44.16
380. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	153.18 SF	0.00	1.48	0.00	226.71
---C + (PF*4)					
Height Add-ons					
381. Additional cost for high wall or ceiling - 11' to 14'	132.30 SF	0.00	0.06	0.00	7.94
---PF*4'11					
382. Additional cost for high wall or ceiling - 11' to 14'	107.64 SF	0.00	0.05	0.00	5.38
---PF*4					
383. Additional cost for high wall or ceiling - Over 14'	26.91 SF	0.00	0.10	0.00	2.69
--PF *1					
Totals: C 137 A				0.00	1,878.81



1-800 Water Damage of Newtown



C 137 B

Height: 14' 11"

1,237.52 SF Walls	220.60 SF Ceiling
1,458.12 SF Walls & Ceiling	220.60 SF Floor
24.51 SY Flooring	82.96 LF Floor Perimeter
82.96 LF Ceil. Perimeter	


DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
384. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
385. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
386. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
387. Add for HEPA filter (for canister/backpack vacuums)	0.50 EA	0.00	94.46	0.00	47.23
388. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
389. HEPA Vacuuming - Light - (PER SF)	1,678.71 SF	0.00	0.49	0.00	822.57
---WC+F					
390. Clean more than the walls and ceiling	2,916.23 SF	0.00	0.52	0.00	1,516.44
---WC*2					
391. Clean floor - Light	441.20 SF	0.00	0.40	0.00	176.48
---F*2					
392. Clean ductwork - Exterior (per LF)	30.00 LF	0.00	6.11	0.00	183.30
393. Clean door (per side)	1.00 EA	0.00	10.39	0.00	10.39
394. Clean door / window opening per EA (per side)	1.00 EA	0.00	18.82	0.00	18.82
395. Clean door hardware	1.00 EA	0.00	9.60	0.00	9.60
396. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
397. Clean light fixture	4.00 EA	0.00	15.32	0.00	61.28
398. Cleaning Technician - incl. cleaning agent - per hour	2.00 HR	0.00	60.96	0.00	121.92
---Clean pipes, fire strobes, exit signs etc. Utility Boxes					



1-800 Water Damage of Newtown

CONTINUED - C 137 B

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
SEALING and ENCAPSULATING					
399. Floor protection - heavy paper and tape	220.60 SF	0.00	0.48	0.00	105.89
400. Protect - Cover with plastic ---protect cabinets and walls from overspray	1,237.52 SF	0.00	0.38	0.00	470.26
401. Corrosion mitigation of door hardware	1.00 EA	0.00	6.44	0.00	6.44
402. Corrosion mitigation of light fixture	4.00 EA	0.00	11.04	0.00	44.16
403. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	552.45 SF	0.00	1.48	0.00	817.63
---C + (PF*4)					
Height Add-ons					
404. Additional cost for high wall or ceiling - 11' to 14'	407.90 SF	0.00	0.06	0.00	24.47
---PF*4'11					
405. Additional cost for high wall or ceiling - 11' to 14'	331.85 SF	0.00	0.05	0.00	16.59
---PF*4					
406. Additional cost for high wall or ceiling - Over 14'	82.96 SF	0.00	0.10	0.00	8.30
--PF *1					
Totals: C 137 B				0.00	4,857.63



Break Room

Height: 14' 11"

1,819.07 SF Walls	1,155.20 SF Ceiling
2,974.27 SF Walls & Ceiling	1,155.20 SF Floor
128.36 SY Flooring	121.95 LF Floor Perimeter
121.95 LF Ceil. Perimeter	

Missing Wall	8' 6 3/8" X 14' 11"	Opens into EAST_HALL
Missing Wall	0" X 14' 11"	Opens into EAST_HALL
Missing Wall	0" X 14' 11"	Opens into WEST_HALL
Missing Wall	8' 6 3/8" X 14' 11"	Opens into WEST_HALL

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					



1-800 Water Damage of Newtown

CONTINUED - Break Room

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
407. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
408. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---Reflects 1 scrubber for 3 days					
409. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
410. Add for HEPA filter (for canister/backpack vacuums)	0.50 EA	0.00	94.46	0.00	47.23
411. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
412. HEPA Vacuuming - Light - (PER SF)	4,129.46 SF	0.00	0.49	0.00	2,023.44
---WC+F					
413. Clean more than the walls and ceiling	5,948.53 SF	0.00	0.52	0.00	3,093.24
---WC*2					
414. Clean floor - Light	2,310.39 SF	0.00	0.40	0.00	924.16
---F*2					
415. Clean ductwork - Exterior (per LF)	171.00 LF	0.00	6.11	0.00	1,044.81
416. Clean door (per side)	1.00 EA	0.00	10.39	0.00	10.39
417. Clean window unit (per side) 10 - 20 SF	12.00 EA	0.00	21.81	0.00	261.72
418. Clean door / window opening per EA (per side)	13.00 EA	0.00	18.82	0.00	244.66
419. Clean door hardware	1.00 EA	0.00	9.60	0.00	9.60
420. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
421. Clean light fixture	20.00 EA	0.00	15.32	0.00	306.40
422. Cleaning Technician - incl. cleaning agent - per hour	2.00 HR	0.00	60.96	0.00	121.92
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
423. Floor protection - heavy paper and tape	1,155.20 SF	0.00	0.48	0.00	554.50
424. Protect - Cover with plastic	1,819.07 SF	0.00	0.38	0.00	691.25
---protect cabinets and walls from overspray					



DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
425. Corrosion mitigation of window unit (per side) 10 - 20 SF	12.00 EA	0.00	14.55	0.00	174.60
426. Corrosion mitigation of door hardware	1.00 EA	0.00	6.44	0.00	6.44
427. Corrosion mitigation of light fixture	20.00 EA	0.00	11.04	0.00	220.80
428. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	1,642.99 SF	0.00	1.48	0.00	2,431.63
---C + (PF*4)					
Height Add-ons					
429. Additional cost for high wall or ceiling - 11' to 14'	599.58 SF	0.00	0.06	0.00	35.97
---PF*4'11					
430. Additional cost for high wall or ceiling - 11' to 14'	487.80 SF	0.00	0.05	0.00	24.39
---PF*4					
431. Additional cost for high wall or ceiling - Over 14'	121.95 SF	0.00	0.10	0.00	12.20
--PF *1					
Totals: Break Room				0.00	12,635.21



Height: 14' 11"

2,299.57 SF Walls
3,025.37 SF Walls & Ceiling
80.64 SY Flooring
158.12 LF Ceil. Perimeter

725.80 SF Ceiling
725.80 SF Floor
149.26 LF Floor Perimeter

Missing Wall - Goes to Floor

8' 10 5/16" X 6' 8"

Opens into LOCKER_HALLW

Missing Wall

8' 6 3/8" X 14' 11"

Opens into BREAK_ROOM

Missing Wall

0" X 14' 11"

Opens into BREAK_ROOM

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
432. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
433. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56



1-800 Water Damage of Newtown

CONTINUED - West HALL


DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
---Reflects 1 scrubber for 3 days					
434. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
435. Add for HEPA filter (for canister/backpack vacuums)	0.25 EA	0.00	94.46	0.00	23.62
436. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
437. HEPA Vacuuming - Light - (PER SF)	3,751.17 SF	0.00	0.49	0.00	1,838.07
---WC+F					
438. Clean more than the walls and ceiling	6,050.74 SF	0.00	0.52	0.00	3,146.38
---WC*2					
439. Clean floor - Light	1,451.61 SF	0.00	0.40	0.00	580.64
---F*2					
440. Clean ductwork - Exterior (per LF)	145.00 LF	0.00	6.11	0.00	885.95
441. Clean door (per side)	8.00 EA	0.00	10.39	0.00	83.12
442. Clean window unit (per side) 10 - 20 SF	7.00 EA	0.00	21.81	0.00	152.67
443. Clean door / window opening per EA (per side)	7.00 EA	0.00	18.82	0.00	131.74
444. Clean door hardware	8.00 EA	0.00	9.60	0.00	76.80
445. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
446. Clean light fixture	8.00 EA	0.00	15.32	0.00	122.56
447. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
448. Floor protection - heavy paper and tape	725.80 SF	0.00	0.48	0.00	348.38
449. Protect - Cover with plastic	2,299.57 SF	0.00	0.38	0.00	873.84
---protect cabinets and walls from overspray					
450. Corrosion mitigation of window unit (per side) 10 - 20 SF	7.00 EA	0.00	14.55	0.00	101.85
451. Corrosion mitigation of door hardware	8.00 EA	0.00	6.44	0.00	51.52
452. Corrosion mitigation of light fixture	8.00 EA	0.00	11.04	0.00	88.32



1-800 Water Damage of Newtown

CONTINUED - West HALL

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
453. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat ---C + (PF*4)	1,322.85 SF	0.00	1.48	0.00	1,957.82
Height Add-ons					
454. Additional cost for high wall or ceiling - 11' to 14' ---PF*4'11	733.87 SF	0.00	0.06	0.00	44.03
455. Additional cost for high wall or ceiling - 11' to 14' ---PF*4	597.05 SF	0.00	0.05	0.00	29.85
456. Additional cost for high wall or ceiling - Over 14' --PF *1	149.26 SF	0.00	0.10	0.00	14.93
Totals: West HALL				0.00	11,008.91

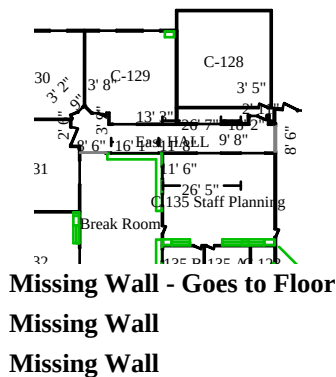

East HALL

Height: 14' 11"

2,358.84 SF Walls	715.24 SF Ceiling
3,074.08 SF Walls & Ceiling	715.24 SF Floor
79.47 SY Flooring	153.42 LF Floor Perimeter
161.95 LF Ceil. Perimeter	

Missing Wall - Goes to Floor
Missing Wall
Missing Wall

8' 6 3/8" X 6' 8"
0" X 14' 11"
8' 6 3/8" X 14' 11"

Opens into LOCKER_HALLW
Opens into BREAK_ROOM
Opens into BREAK_ROOM

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
EQUIPMENT					
457. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.					
458. Negative air fan/Air scrubber (24 hr period) - No monit. ---Reflects 1 scrubber for 3 days	3.00 DA	0.00	73.52	0.00	220.56
459. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
460. Add for HEPA filter (for canister/backpack vacuums)	0.25 EA	0.00	94.46	0.00	23.62



1-800 Water Damage of Newtown

CONTINUED - East HALL

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
461. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
CLEAN					
462. HEPA Vacuuming - Light - (PER SF)	3,789.31 SF	0.00	0.49	0.00	1,856.76
---WC+F					
463. Clean more than the walls and ceiling	6,148.15 SF	0.00	0.52	0.00	3,197.04
---WC*2					
464. Clean floor - Light	1,430.47 SF	0.00	0.40	0.00	572.19
---F*2					
465. Clean ductwork - Exterior (per LF)	145.00 LF	0.00	6.11	0.00	885.95
466. Clean door (per side)	4.00 EA	0.00	10.39	0.00	41.56
467. Clean window unit (per side) 10 - 20 SF	15.00 EA	0.00	21.81	0.00	327.15
468. Clean door / window opening per EA (per side)	15.00 EA	0.00	18.82	0.00	282.30
469. Clean door hardware	4.00 EA	0.00	9.60	0.00	38.40
470. Clean smoke/carbon monoxide detector	1.00 EA	0.00	9.05	0.00	9.05
471. Clean light fixture	8.00 EA	0.00	15.32	0.00	122.56
472. Cleaning Technician - incl. cleaning agent - per hour	1.00 HR	0.00	60.96	0.00	60.96
---Clean pipes, fire strobes, exit signs etc					
SEALING and ENCAPSULATING					
473. Floor protection - heavy paper and tape	715.24 SF	0.00	0.48	0.00	343.32
474. Protect - Cover with plastic	2,358.84 SF	0.00	0.38	0.00	896.36
---protect cabinets and walls from overspray					
475. Corrosion mitigation of window unit (per side) 10 - 20 SF	15.00 EA	0.00	14.55	0.00	218.25
476. Corrosion mitigation of door hardware	4.00 EA	0.00	6.44	0.00	25.76
477. Corrosion mitigation of light fixture	8.00 EA	0.00	11.04	0.00	88.32
478. Seal more than the ceiling with fungicidal/bacterial inhibitor - one coat	1,328.90 SF	0.00	1.48	0.00	1,966.77
---C + (PF*4)					
Height Add-ons					
479. Additional cost for high wall or ceiling - 11' to 14'	754.30 SF	0.00	0.06	0.00	45.26




CONTINUED - East HALL

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
---PF*4'11					
480. Additional cost for high wall or ceiling - 11' to 14'	613.67 SF	0.00	0.05	0.00	30.68
---PF*4					
481. Additional cost for high wall or ceiling - Over 14'	153.42 SF	0.00	0.10	0.00	15.34
--PF *1					
Totals: East HALL				0.00	11,434.41
Total: Main Level				0.00	142,989.65

Level 2

Stairs

Height: 23' 8"




Missing Wall

468.82 SF Walls
534.33 SF Walls & Ceiling
12.87 SY Flooring
24.34 LF Ceil. Perimeter

65.51 SF Ceiling
115.86 SF Floor
29.32 LF Floor Perimeter

5' 7" X 23' 7 15/16"

Opens into Exterior



Missing Wall

Missing Wall

Subroom: Stairs2 (3)

Height: 23' 8"

466.77 SF Walls
518.66 SF Walls & Ceiling
10.23 SY Flooring
24.16 LF Ceil. Perimeter

51.89 SF Ceiling
92.06 SF Floor
14.49 LF Floor Perimeter

4' 3 7/8" X 23' 7 15/16"


4' 3 7/8" X 23' 7 15/16"

Opens into STAIRS1

Opens into STAIRS3



CONTINUED - Stairs



Subroom: Stairs1 (1)

Height: 14' 11"

361.97 SF Walls	65.84 SF Ceiling
427.81 SF Walls & Ceiling	65.84 SF Floor
7.32 SY Flooring	24.27 LF Floor Perimeter
24.27 LF Ceil. Perimeter	

Missing Wall


5' 5 1/8" X 14' 11"

Opens into STAIRS

Missing Wall

4' 3 7/8" X 14' 11"

Opens into STAIRS2



Subroom: Stairs3 (2)

Height: 14' 11"

354.15 SF Walls	57.97 SF Ceiling
412.12 SF Walls & Ceiling	57.97 SF Floor
6.44 SY Flooring	23.74 LF Floor Perimeter
23.74 LF Ceil. Perimeter	

Missing Wall

4' 3 7/8" X 14' 11"

Opens into STAIRS2

Missing Wall

5' 6 7/8" X 14' 11"

Opens into Exterior

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
-------------	-----	--------	---------	-----	-------

EQUIPMENT

482. Equipment setup, take down, and monitoring (hourly charge)	0.33 HR	0.00	76.31	0.00	25.18
---	---------	------	-------	------	-------

*** REGULAR HOURS: 1 piece of equipment for set up at 10 minutes per (1*10/60) = .166 hours. 1 piece of equipment for take down at 10 minutes per (1*10/60) = .166 hours.

483. Negative air fan/Air scrubber (24 hr period) - No monit.	3.00 DA	0.00	73.52	0.00	220.56
---	---------	------	-------	------	--------

---Reflects 1 scrubber for 3 days

484. Add for HEPA filter (for negative air exhaust fan)	0.45 EA	0.00	213.07	0.00	95.88
---	---------	------	--------	------	-------

485. Add for HEPA filter (for canister/backpack vacuums)	0.25 EA	0.00	94.46	0.00	23.62
--	---------	------	-------	------	-------

486. Equipment decontamination charge - per piece of equipment	1.00 EA	0.00	45.19	0.00	45.19
--	---------	------	-------	------	-------

CLEAN

487. Clean concrete step	27.00 EA	0.00	8.33	0.00	224.91
--------------------------	----------	------	------	------	--------

488. Clean floor - Light	242.00 SF	0.00	0.40	0.00	96.80
--------------------------	-----------	------	------	------	-------

---Both landings 170+(12*6)

489. Clean handrail - wall mounted	24.50 LF	0.00	0.76	0.00	18.62
------------------------------------	----------	------	------	------	-------

--- 12'3*2



1-800 Water Damage of Newtown

CONTINUED - Stairs

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
490. Clean iron handrail	27.00 LF	0.00	3.80	0.00	102.60
--- 12'3+12'3+1'3+1'3 . Clean the railing with spindles and balusters					
491. HEPA Vacuuming - Light - (PER SF)	1,983.43 SF	0.00	0.49	0.00	971.88
---W+F					
492. Clean more than the walls	3,303.43 SF	0.00	0.52	0.00	1,717.78
---W*2					
493. Clean window unit (per side) 10 - 20 SF	3.00 EA	0.00	21.81	0.00	65.43
Height Add-ons					
494. Additional cost for high wall or ceiling - 11' to 14'	451.43 SF	0.00	0.06	0.00	27.09
---PF*4'11					
Totals: Stairs				0.00	3,635.54
Total: Level 2				0.00	3,635.54
Total: Source - Encircle 1				0.00	146,625.19
Line Item Totals: 5116-26-0264-CLN2				0.00	152,411.70



1-800 Water Damage of Newtown

Grand Total Areas:

49,843.63	SF Walls	21,381.54	SF Ceiling	71,225.18	SF Walls and Ceiling
21,562.57	SF Floor	2,395.84	SY Flooring	3,413.60	LF Floor Perimeter
0.00	SF Long Wall	0.00	SF Short Wall	3,473.30	LF Ceil. Perimeter
21,562.57	Floor Area	22,471.25	Total Area	46,775.36	Interior Wall Area
22,379.33	Exterior Wall Area	1,529.48	Exterior Perimeter of Walls		
0.00	Surface Area	0.00	Number of Squares	0.00	Total Perimeter Length
0.00	Total Ridge Length	0.00	Total Hip Length		

Coverage	Item Total	%	ACV Total	%
Dwelling	149,552.95	98.12%	149,552.95	98.12%
Other Structures	0.00	0.00%	0.00	0.00%
Contents	2,858.75	1.88%	2,858.75	1.88%
Total	152,411.70	100.00%	152,411.70	100.00%



1-800 Water Damage of Newtown

Summary for Dwelling

Line Item Total	149,552.95
Replacement Cost Value	\$149,552.95
Net Claim	\$149,552.95

Sid Sarin




1-800 Water Damage of Newtown

Summary for Contents

Line Item Total	2,858.75
Replacement Cost Value	\$2,858.75
Net Claim	\$2,858.75

Sid Sarin

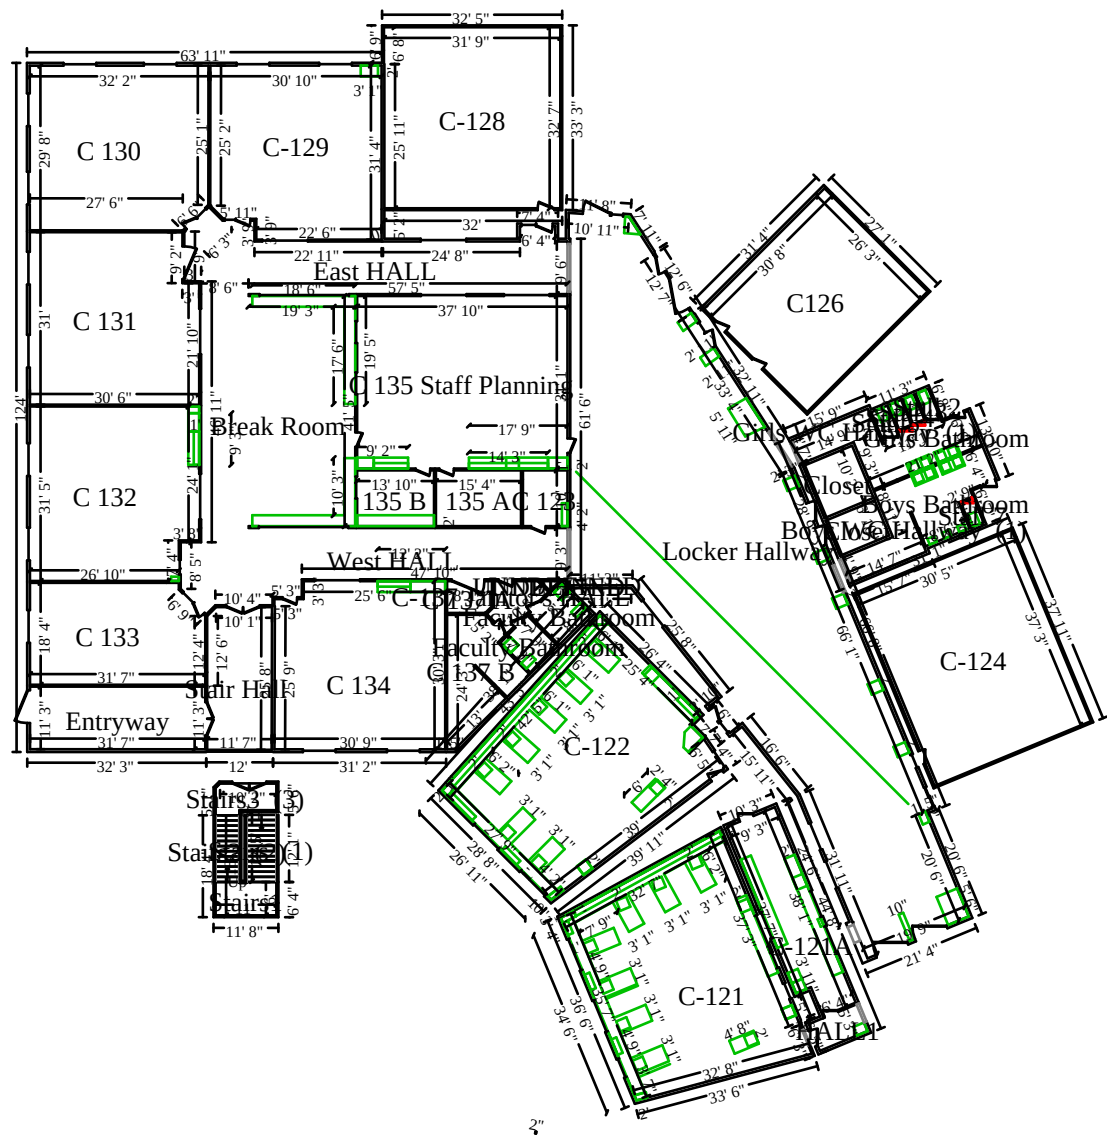

Main Level

