Webstaurant

Sales Quote - THIS IS NOT AN INVOICE

Quote Number 10084479

Created 9/10/2026

Bill to
WJHSD (Christa Gaugler)

830 Old Clairton Road
Clairton, PA 15025

Ship to
John Rambo
West Jefferson Hills School District
830 Old Clairton Road
Jefferson Hills, PA 15025

Your Contact
Quote Dept.

Quote Valid
Thru 9/11/2026

Customer Phone
4124755168

Email Address
cgaugler@wjhsd.net

Quote

Item	Description	Weight(Estimated)	Unit Price	QTY	Total
 415KKM322MAK	Hoshizaki KM-322MAK Slim-Line Series 22" Air-Cooled Modular Crescent Ice Machine with Stainless Steel Finish and 300 lb. Storage - 489 lb., 115V, 1 Phase	260 lbs	$5,499.00	1	$5,499.00

Subtotal	$5,499.00
Tax	$0.00
Total	$5,499.00

*** Quotes must be ordered through our website.**

Instruction / Additional Information
No additional information entered. * This quote is valid with original information supplied by customer. Any modification could change quoted prices.
* Please note: all prices are subject to change. Shipping charges and tax are estimated.
Quote Generated By Quote Dept.

ALLEGHENY REFRIGERATION

Quote

09/10/2026

To:
West Jefferson School District
CHRISTA GAUGLER
412-655-8616 6279 (Contact)

Project:
WEST JEFFERSON HILLS - ICE MACINE

From:
Allegheny Refrigeration Sales Co.
Michael Chichwak
1228 Brighton Road
Pittsburgh, PA 15233-1602
(412)321-6626
412-694-6349 207 (Contact)

Project Code: 35488

Job Reference Number: 15813

Allegheny Refrigeration Sales Co.

EXPERT KNOWLEDGE IN FOODSERVICE EQUIPMENT & DESIGN

Item	Qty	Description	Sell	Sell Total
1	1 ea	**ICE MAKER, CUBE-STYLE** Hoshizaki Model No. KM-322MAK Ice Maker, Cube-Style, 22"W, 489 lbs. per 24 hours, factory-installed ultrasonic bin control, individual crescent cube, R290 hydrocarbon refrigerant, self-diagnostic programming, stainless steel double-sided evaporator, removable air filters, 115V/60/1-ph, 9.05 amps, NSF, UL, ENERGY STAR®	$4,399.00	$4,399.00
	1 ea	Warranty: 3-Year parts & labor on entire machine		
	1 ea	Warranty: 5-Year parts & labor on evaporator		
	1 ea	Warranty: 5-Year parts on compressor & air-cooled condenser		
			ITEM TOTAL:	**$4,399.00**
2	1 ea	**ICE BIN FOR ICE MACHINES** Hoshizaki Model No. B-300SF Ice Bin, 22"W, top-hinged front-opening door, 300-lb ice storage capacity, for top-mounted ice maker, stainless steel exterior, 6" painted flange legs included, protected with H-GUARD Plus Antimicrobial Agent, ETL, ETL-Sanitation	$1,500.00	$1,500.00 -$5899
	1 ea	Warranty: 3-Year parts & labor for bin		
			ITEM TOTAL:	**$1,500.00**
3	1 ea	**ICE BIN FOR ICE MACHINES** Hoshizaki Model No. B-500SF Ice Bin, 30"W, top-hinged front-opening door, 500-lb ice storage capacity, for top-mounted ice maker, stainless steel exterior, painted legs included, protected with H-GUARD Plus Antimicrobial Agent, ETL, ETL-Sanitation	$1,675.00	<Alternate>
	1 ea	Warranty: 3-Year parts & labor for bin		<Alternate>







Initial: _____

Item	Qty	Description	Sell	Sell Total
	1 kt	HS-2033 Top Kit, 8", ABS	$175.00	<Alternate>
		ITEM TOTAL: <Alternate>		**$1,850.00**
4	1 ea	**WATER FILTER ASSEMBLY** Systems IV Model No. CC1 Crystal Clear One - Complete water filtration with and scale control for small ice makers, up to 600 lbs./ cuber, Up to six months cartridge life, 3/8" flare or easy connect fittings, 2.25 gpm	$145.00	$145.00
		ITEM TOTAL:		**$145.00**
5	1 ea	**ICE BIN FOR ICE MACHINES** Hoshizaki Model No. HS-5607 Scoop Holder Kit	$95.00	<Alternate>
		ITEM TOTAL: <Alternate>		**$95.00**
6	1 ea	**INSTALLATION** Allegheny Refrigeration Sales Co. Inc. Model No. DNI Deliver, Uncrate, Install Component Ware, Set in Place. DELIVER AND INSTALL	$500.00	$500.00
		ITEM TOTAL:		**$500.00**
7	1 ea	**INSTALLATION** Allegheny Refrigeration Sales Co. Inc. Model No. DNI Deliver, Uncrate, Install Component Ware, Set in Place. DELIVER ONLY	~~$220.00~~	<Alternate>
		ITEM TOTAL: <Alternate>		**$220.00**
		Total		$6,544.00

For credit card payments, a 3% processing fee will be added to all invoices over $1,200.00.
We cannot accept project deposits in the form of a credit card payment.

Acceptance: _____ Date: _____

Printed Name: _____

Project Grand Total: $6,544.00

with delivery
~ $280
+ 5,899
$6,179.00

Initial: _____

Quote

09/10/2026

To:
West Jefferson Hills School District
John Rambo

Project:
Pleasant Hills Middle School
404 Old Clairton Rd
Pittsburgh, PA 15236

From:
Carney & Sloan, Inc.
Ryan Carney
518 Main St.
Wheeling, WV 26003-2524
304-233-5000

Job Reference Number: 10902

Freight estimates are provided as a courtesy and are subject to change without notice. Rates are subject to freight carrier fuel surcharges and fees at time of shipment and are not guaranteed. Special services such as lift gate, inside delivery, and residential delivery will be subject to additional charges.

Item	Qty	Description	Sell	Sell Total
1	1 ea	**ICE MAKER, CUBE-STYLE** Hoshizaki Model No. KM-322MAK Ice Maker, Cube-Style, 22"W, 489 lbs. per 24 hours, factory-installed ultrasonic bin control, individual crescent cube, R290 hydrocarbon refrigerant, self-diagnostic programming, stainless steel double-sided evaporator, removable air filters, 115V/60/1-ph, 9.05 amps, NSF, UL, ENERGY STAR® 1 ea Warranty: 3-Year parts & labor on entire machine 1 ea Warranty: 5-Year parts & labor on evaporator 1 ea Warranty: 5-Year parts on compressor & air-cooled condenser 1 ea B-300SF Ice Bin, 22"W, top-hinged front-opening door, 300-lb ice storage capacity, for top-mounted ice maker, stainless steel exterior, 6" painted flange legs included, protected with H-GUARD Plus Antimicrobial Agent, ETL, ETL-Sanitation 1 ea Warranty: 3-Year parts & labor for bin **BIN INCLUDED IN ICE MACHINE PRICE.**	$5,950.00	$5,950.00
2	1 ea	**DELIVERY/INSTALLATION** CSI Model No. DELIVERY/INSTALLATION RECEIVE AND UNCRATE, INSPECT FOR FREIGHT DAMAGE, DELIVER, AND SET-IN PLACE. CARNEY AND SLOAN WILL HAUL AWAY EXISTING UNIT. CONNECTIONS TO BE MADE BY CARNEY AND SLOAN INC.	$550.00	$550.00



Initial: _____

Item	Qty	Description	Sell	Sell Total
		INITIAL HERE: _____		
			Total	$6,500.00



CARNEY & SLOAN REQUIRES A SIGNED CONTRACT TO PROCESS ORDER

Signature_____

This proposal is subject to the Buyer obtaining financial arrangements that are acceptable to Carney & Sloan Inc. PAYMENT TO BE MADE AS FOLLOWS:

NET 30 DAYS

NOTE: If payment is made by Credit Card a 3% Processing fee will be added

All material is guaranteed to be as specified. All work to be completed in workmanlike manner according to standard practices. Any alteration or deviation from above specifications involving a change in the cost will be executed only upon a written change order. Any additional requirements made by the building or health inspector after the signing of these contract documents are the responsibility of the Buyer. In the event Buyer cancels his purchase of all or any of the goods hereunder, Buyer shall be liable to Seller for any manufacturer's restocking fees, freight or any related charges. NOTE: THE

ABOVE PRICES DO NOT INCLUDE FEES, PERMITS OR TAXES AND WILL HOLD FIRM FO 30 DAYS FROM THE DATE OF THIS PROPOSAL.

AUTHORIZED SIGNATURE Ryan Carney _CARNEY & SLOAN INC.

WV Contractor's License #WV028897

ACCEPTANCE OF PROPOSAL The above prices, specifications and conditions are satisfactory and are hereby accepted. You are authorized to do the work as specified. Payment will be made as outlined above.

SECURITY AGREEMENT: Purchaser, for valuable consideration, hereby grants to Carney & Sloan Inc. security interest in all equipment and consumer goods furnished by Carney & Sloan Inc. pursuant to Purchaser's open-end credit account and as well grants a security interest in all property described above, all of which is intended to remain personality. This agreement shall not be rendered void by the fact that as of any particular date, there is no outstanding secured obligations, and no commitment to make advances. If at such time additional future advances are completed by the parties hereto or any of them in the form of an open-end credit account, this agreement shall if otherwise valid, continue in full force and effect and as security for any indebtedness of the debtor to the secured party, incurred or arising prior to the filling of record of a termination statement with respect hereto as required by law.
Open account balances are due in full, 10 days after the date of purchase. If not paid a Periodic Rate (Finance Charge) of 1 ½ % per month (Annual Percentage Rate of 18%) will be assessed on the balance. The Vendor Is Not Bound by Any Verbal Agreement or Modification of the Terms of this Contract.

Acceptance: _____ Date: _____

Printed Name: _____

Project Grand Total: $6,500.00

KM-322/522/622MAK
08/31/26
Item # 13260K

SLIM-LINE MODULAR CRESCENT CUBER

Item #: _____

Project: _____


Qty: _____

AIA#: _____

W x D x H
22" x 27 3/8" x 28"


Air-Cooled
KM-322MAK ★
KM-522MAK ★
KM-622MAK ★

★ ENERGY STAR

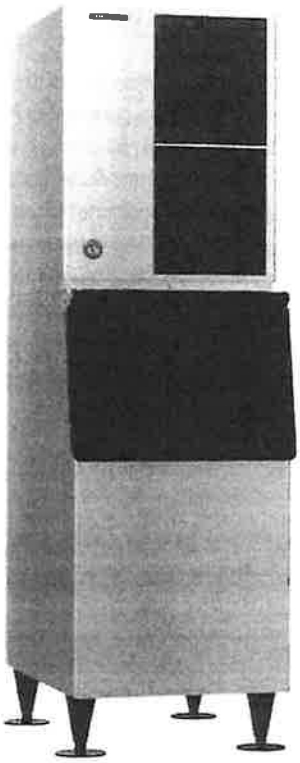

Air-cooled model
shown on optional bin: B-300

KM*Edge*™ Cube Dimensions*



*approximate size in inches, image not to scale

NSF · AHRI CERTIFIED · UL CERTIFIED SA10201 · NATURAL

GEORGIA MADE · FACTORY WARRANTY Parts & Labor 3 5 Parts 5 · kcl AQ

Features

- **Individual crescent cube**
- **Factory-installed ultrasonic bin control can be adjusted on site**
- **Environmentally friendly R290 hydrocarbon refrigerant**
- **Simple, one-hour cleaning process** CLEANASSIST

- Durable construction with fewer parts
- Self-diagnostic programming automatically adjusts to changing conditions
- Snap fit parts for easy cleaning
- Stainless steel double-sided evaporator
- CycleSaver™ design
- EverCheck™ alert system
- Removable air filters

Available on Bins/Dispensers:

B-250SF	B-500/SF	B-800SF	B-1150SS	DB-130H
B-300SF	B-700SF	B-900SF	B-1300SS	DB-200H
				DM-200B

Top kit may be required. See Bin Spec Sheets.

Warranty:
3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on evaporator.
5 Year Parts on Compressor; air-cooled condenser coil.
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping Dimensions: 33.5" x 25.88" X 34.6" in one 17.36ft³

		ICE PRODUCTION		WATER USAGE		ELECTRICAL							
Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/ 50°F	90°/ 70°F	Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Min. Circuit/ Max. Fuse Size	Amperage	Voltage	Circuit Wires (including ground)	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
Air	KM-322MAK	489	400	18.0	N/A	4.9	15A	9.7A	115V/60/1	3	7,700	5.1 oz.	145 / 175
Air	KM-522MAK	548	445	17.0	N/A	5.15	20A	10.8A	115V/60/1	3	8,400	5.3 oz.	145 / 175
Air	KM-622MAK	673	540	17.0	N/A	5.25	20A	14.6A	115V/60/1	3	8,400	5.3 oz.	150 / 180

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104 - 127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Service

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters. (Air-cooled model only)
- Allow 6" (15 cm) clearance at rear, sides and top for proper air circulation and ease of maintenance/service

Plumbing

- Icemaker water supply line: minimum 1/4" nominal ID copper water tubing or equivalent
- Icemaker drain line: minimum 3/4" nominal ID hard pipe or equivalent

Water-Cooled Model (Lines Must Be Independent of Icemaker)

- Condenser water supply line: minimum 1/4" nominal ID copper water tubing or equivalent
- Condenser drain/return line: minimum 1/4" nominal ID hard pipe (open drain system) or copper water tubing (closed loop system) or equivalent

Accessories


- HS-5767 BioSure Clean Ice Ozone System
- HS-5562 Remote Monitoring System
- HS-5426 Tamper Proof Kit, Air-cooled
- H9320-51 Single Water Filter Kit

Hoshizaki reserves the right to change specifications without notice.


KM-322/522/622MAK

SLIM-LINE MODULAR CRESCENT CUBER


FRONT VIEW

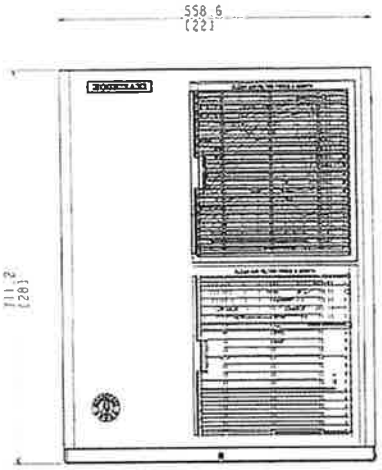


SIDE VIEW

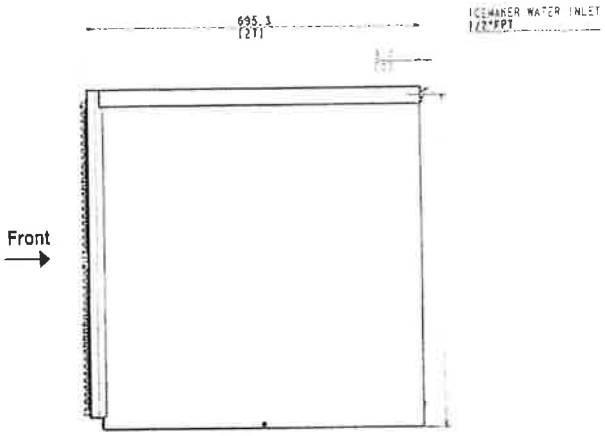

REAR VIEW

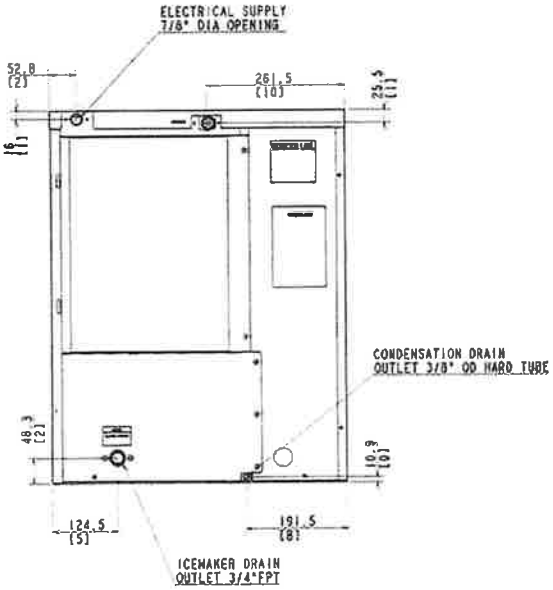


BOTTOM VIEW

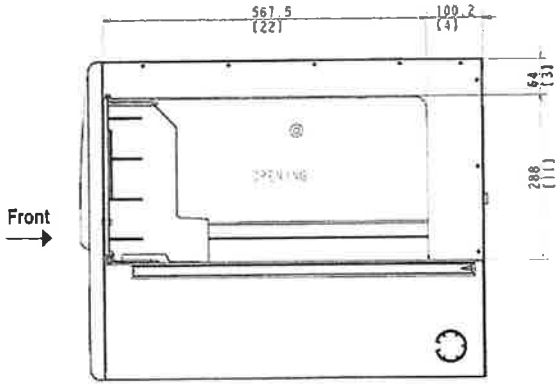

ICE STORAGE BIN SERIES

Item: _____
Project: _____
Qty: _____
A/A#: _____

SF - Stainless Steel Finish

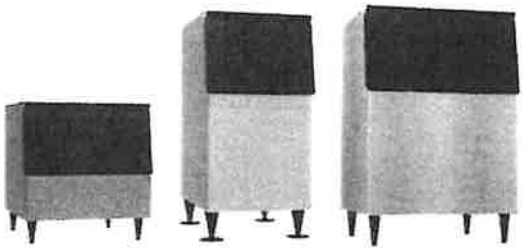

B-250SF | B-300SF BD-300SF | B-500SF BD-500SF



B-700SF | B-800SF | B-900SF

Features

- **Polyethylene bin liner for sanitary storage**
- **Sturdy construction for side-by-side or stacked ice machine installation**

- Ice storage capacity from 250 lbs. up to 900 lbs.
- Both surfaces are designed for easy cleaning
- Long lasting attractive appearance
- Foamed-in-place polyurethane insulation, in all bin walls and bottom, provides dependable ice storage

SF - Stainless Steel Finish

BD Bins
- Fit 24" - 24 1/2" deep ice machine without top kit extension

Warranty:
2 Year Parts & Labor (Production prior to January 2012)
3 Year Parts & Labor (Production January 2012 and after)
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Model Number	Exterior Dimensions W x D x H*	Interior Dimensions W x D x H	Application Storage Capacity†	Cubic Volume	Shipping Dimensions L x W x H	Shipping Weight (lbs.)
B-250SF	30" x 32.3" x 33.4"	27" x 27.7" x 23.7"	250 lbs.	10.30 ft³	35" x 32" x 32"	—
B-300SF	22" x 32.3" x 46"	19" x 27.7" x 37.6"	300 lbs.	11.51 ft³	35" x 24" x 45"	125
BD-300SF	22" x 32.3" x 46"	19" x 27.7" x 37.6"	300 lbs.	11.51 ft³	35" x 24" x 45"	130
B-500SF	30" x 32.3" x 46"	27" x 27.7" x 37.6"	500 lbs.	16.33 ft³	35" x 32" x 45"	140
BD-500SF	30" x 32.3" x 46"	27" x 27.7" x 37.6"	500 lbs.	16.33 ft³	35" x 32" x 45"	140
B-700SF	44" x 32.3" x 46"	41" x 27.7" x 37.6"	700 lbs.	24.77 ft³	46" x 35" x 45"	175
B-800SF	48" x 32.3" x 46"	45" x 27.7" x 37.6"	800 lbs.	26.90 ft³	50.25" x 35" x 45"	185
B-900SF	52" x 32.3" x 46"	49" x 27.7" x 37.6"	900 lbs.	29.59 ft³	54.5" x 35" x 45"	195

*Height includes 6" legs
†Capacity based on volume x 30 lb/ft³ average density of ice.

Hoshizaki reserves the right to change specifications without notice.

SF Bins

ICE STORAGE BIN SERIES

Ice Machine Model Application

	22" Width KM-350M KM-520M KM-660M F-450M F-801M F-1002M	22" Width KMD-410M† KMS-822M FD-650M-C† FD-1002M-C	30" Width KM-901M KM-1100M KM-1340M KM-1601M KML Series F-1501M F-2001	30" Width KMD-355M KMD-505M KMD-705M KMD-460M‡ KMD-530M‡ KMD-860M‡ KMS-1402M* KMS-2000M*	44" Width 2 KM-350M 2 KM-520M 2 KM-660M IM-500S 2 F-450M 2 F-801M 2 F-1002M	44" Width 2 KMD-410M 2 FD-650M-C 2 FD-1002M-C	48" Width KM-1301S KM-1400S KM-1601S KM-1900S KM-2200S KM-2600S
Bins B-300SF DB-130H	—	NEED HS-2153	N/A	N/A	N/A	N/A	N/A
Bins B-250SF B-500SF	NEED HS-2033	NEED HS-2033 & HS-2129	—	NEED HS-2129	N/A	N/A	N/A
Bins B-700SF	NEED HS-2035	NEED HS-2035 & HS-2130	NEED HS-2034	NEED HS-2130 & HS-2034	—	NEED HS-2130 *(KMD-410 does not apply)*	N/A
Bins B-800SF	NEED HS-2035 & HS-2032	NEED HS-2035, HS-2032 & HS-2131	NEED HS-2034 & HS-2032	NEED HS-2131, HS-2034 & HS-2032	NEED HS-2032	NEED HS-2032 & HS-2131	—
Bins B-900SF	NEED HS-2035 & HS-2033	NEED HS-2035, HS-2033 & HS-2132	NEED HS-2035	NEED HS-2132 & HS-2035	NEED HS-2033	NEED HS-2033 & HS-2132	NEED HS-2032
Bins DB-200H DM-200B	NEED HS-2036 *(KM units only)*	N/A	—	NEED HS-2148 *(KMD Series on DB-200H only)*	N/A	N/A	N/A


— No top kit necesary | N/A Combination of ice maker and bin is not possible.

3D Bins fit 24" - 24 1/2" deep ice machine without Top Kit extension.
BD-300SF: KMD-410M, KMS-822M, FD-650M-C, FD-1002M-C
BD-500SF: KMD-460M, KMD-530M, KMD-860M, KMD-355, KMD-505M, KMD-705M


Top Kits:
HS-2032 - 4" ABS Top Kit
HS-2033 - 8" ABS Top Kit
HS-2034 - 14" ABS Top Kit
HS-2035 - 22" ABS Top Kit
HS-2036 - (2) 4" ABS Top Kits
HS-2066 - Seismic Kit for SD 500 Stands
HS-2071 - Anchored Leg Kit SD 500 Stands
HS-2111 - 11.3" x 26.2" Stainless Cover/Separator
HS-2148 - 30" x 3.1" Stainless Cover
HS-2153 - KMD-410 on B-300 bin
HS-2160 - (2) KM-901M / (2) KM-1100M

B-250SF



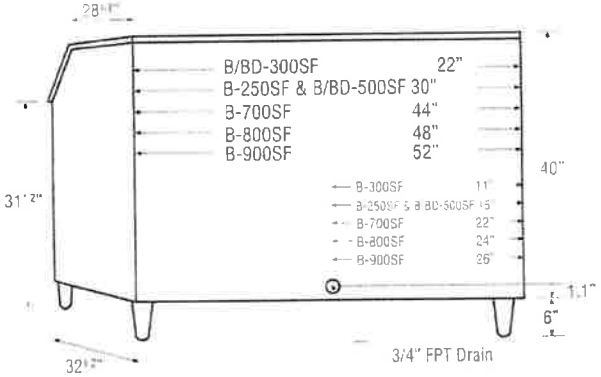


Ice Drop Area



B Bins



BD Bins

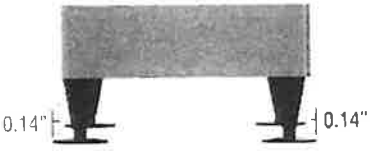

Bin Flanged Legs:
B/BD-300SF



Bin Legs:
B-250SF, B/BD-500SF
B-700SF, B-800SF
B-900SF